



paragon
CARPET TILES



Experience Carpet Tiles

WORKSPACE LOOP

WORKSPACE LOOP

BREEAM 'A+' Rated

MADE IN BRITAIN



Seal of Approval
BRE A+ Rated

Up to 10% recycled content in the top cloth


Up to 50% recycled content in the bitumen backing

Total recycled content of up to 60% with '10 year warranty'







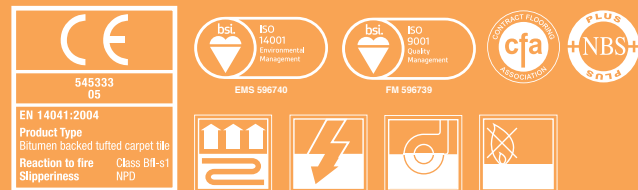







Manufactured in the cleanest carpet tile factory in Europe

Commercial, Education, Health and Retail markets

Workspace Loop



Onyx / Silver / Platinum

	Style	Tufted Loop Pile 1/10" gauge
	Yarn Construction	100% solution dyed nylon
	Pile Yarn Weight	580 gsm
	Pile Height	3mm
	Total Weight	4360 gsm
	Total Thickness	6mm
	Backing	Bitumen
	Dimensions	50cm x 50cm
	Wear Classification	Heavy Contract
	Anti-static	< 2kV body voltage
	Colour Fastness	To Light BS EN (ISO105 – BO2) Better than 6 To Shampoo BS 1006 - UK - TB Change in shade 4 - 5 To Rubbing BS EN (ISO105 - X12) Wet 4 - 5, Dry 4 - 5
	Flammability Flammability	Floorcoverings tested to BS4790 Low Radius (Hot Metal Nut Test) of Char Euroclass Flammability (BS EN ISO 9239) Bfl-s1 (BS EN ISO 11925-2)
	Castor Chair Test	BS EN 985 / 2.8
	Warranty	10 Year Warranty

Workspace Loop



Farfield Park
Manvers
Wath-upon-Deerne
Rotherham, S63 5DB

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk



BREEAM® 'A+' Rated

Platinum

INSTALLATION



Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.

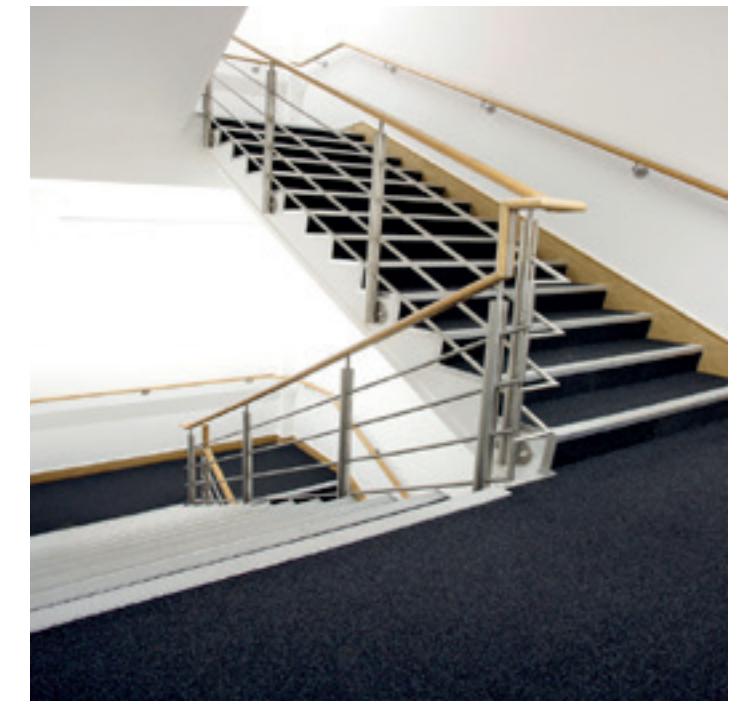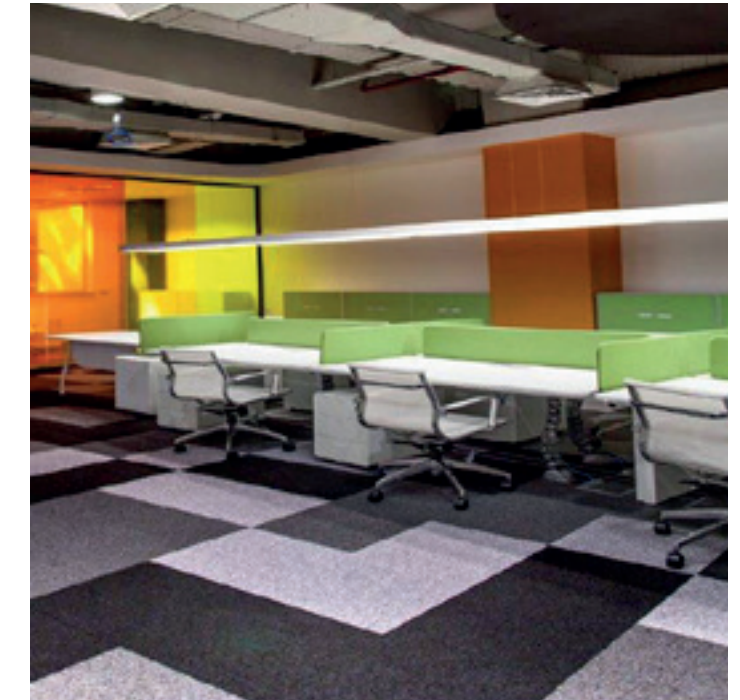

Farfield Park
Manvers
Wath-upon-Deerne
Rotherham, S63 5DB

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk

