



Solid performance and reliability as standard

sirocco

contract rated
10 colourways




sirocco




Tanzanite
(LRV - L26.27 Y4.84)



Tempest
(LRV - L21.09 Y3.22)




Paprika
(LRV - L31.27 Y6.71)




Sapphire
(LRV - L26.97 Y4.95)




Jet
(LRV - L19.10 Y2.78)




Quartz
(LRV - L29.40 Y5.15)



Blue John
(LRV - L28.33 Y5.78)



Topaz
(LRV - L34.92 Y8.50)



Pewter
(LRV - L46.71 Y15.55)



Lime
(LRV - L46.02 Y15.29)

sirocco

Solid performance and reliability as standard

S Style
Tufted Loop Pile Tile 1/10" gauge

Y Yarn Construction
100% Solution Dyed Polypropylene

Pile Yarn Weight
580 gsm

Pile Height
3.5mm

Total Weight
4360 gsm

Total Thickness
6.5mm

Backing
Bitumen

Dimensions
50cm x 50cm

Wear Classification
Contract Rated

Anti-static
<2Kv body voltage. Suitable for use with computers

Static Load to BS 4939
Not less than 80% recovery after 24 hours

Colour Fastness
To Light (BS EN ISO105-B02) Better than 6
To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5

Flammability
Floorcoverings tested to BS4790 Low Radius of Char (Hot Metal Nut Test)

Euroclass Flammability (BS EN ISO 9239) Bfl-s1 (BS EN ISO 11925-2)

Castor Chair Test
Suitable for use with castor chairs

10 Warranty
10 Years

VOC Content
E1 in relation to EN 14041:2004

Suitable for all Commercial and Education Markets

Contract Rated

10 year Warranty

Available in 10 colourways


580 gsm
Pile Yarn Weight

Up to 50% recycled content in the bitumen backing

INSTALLATION - Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR - For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE - It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.

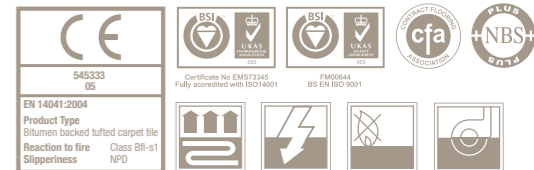



paragon
CARPET TILES



Farfield Park
Manvers
Wath-upon-Dearne
Rotherham, S63 5DB.

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk



Download
our free
app **NOW**